
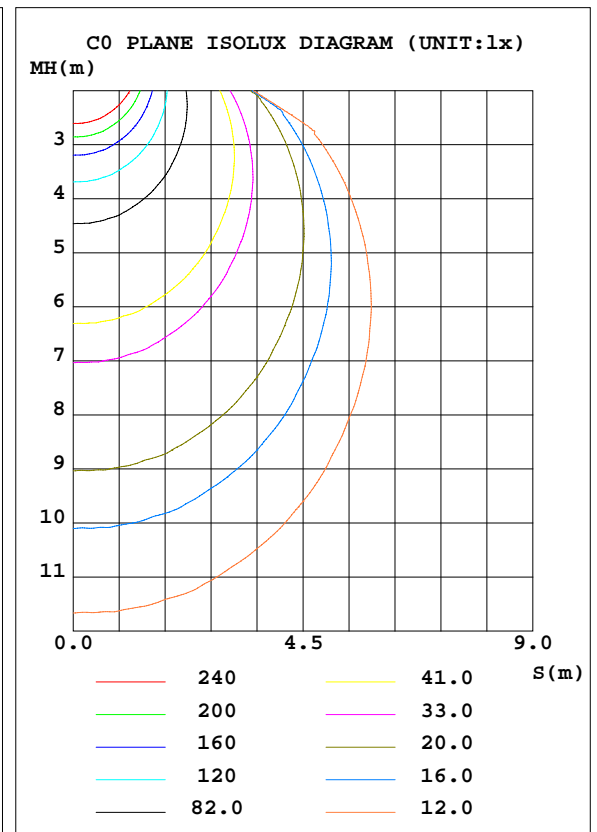


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: 满天星50W 非CE非隔离	TYPE:研发样品	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 92.04 lm/W			
MODEL 满天星50W 非CE非隔离		Imax(cd)	1638	S/MH(C0/180)	1.29
NOMINAL POWER(W)	48	LOR(%)	100.0	S/MH(C90/270)	1.29
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	4417.9	η UP, DN(C0-180)	0.0, 49.4
NOMINAL FLUX(lm)	4417.86	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0, 50.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	231.1	η down(%)	100.0	CIBSE SHR MAX	1.35

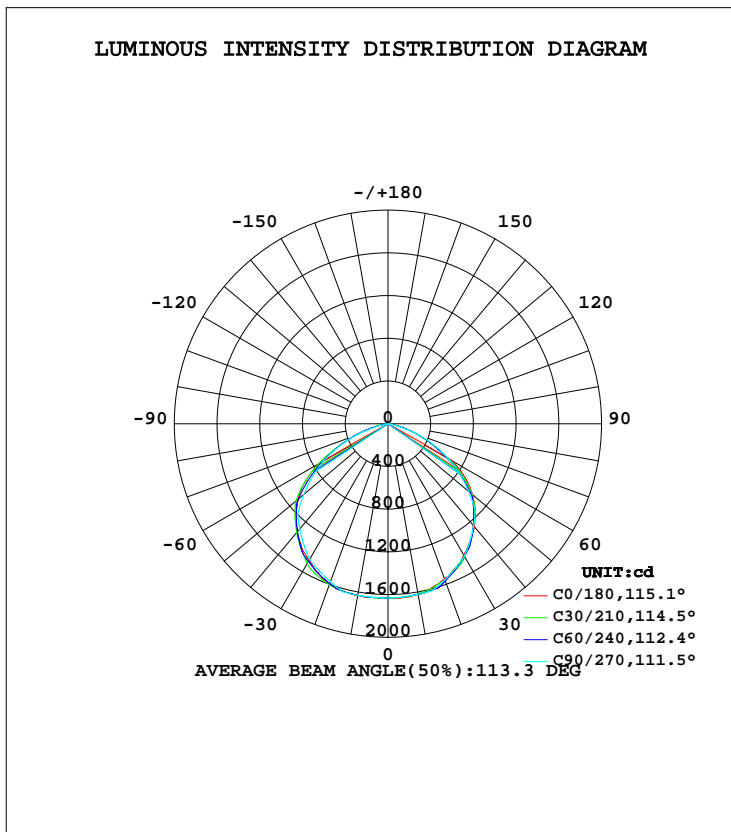


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-07-14

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.266
 Humidity:65.0%
 Test Distance:10.110m [K=1.0000]
 Remarks:

AAI Figure

NAME: 满天星50W 非CE非隔离	TYPE:研发样品	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

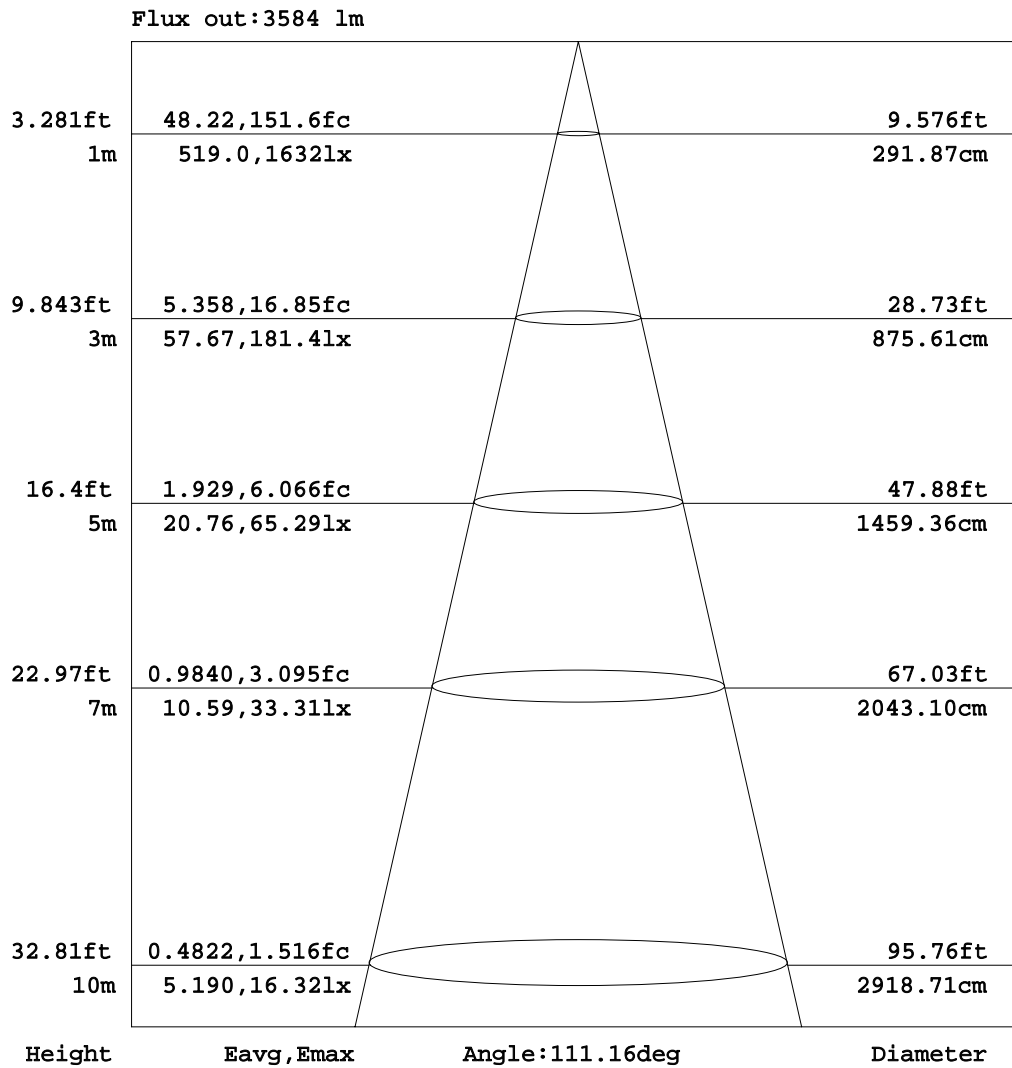

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2017-07-14

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.266
 Humidity:65.0%
 Test Distance:10.110m [K=1.0000]
 Remarks: